



The MX1000

Designed to go places other NVRs can't, the MX1000 is the security industry's first Milestone Certified rugged mobile NVR.

Key Features

- > Record up to 25 high-definition streams simultaneously
- > 9 ~ 48 V power input with automotive intelligence
- > Preloaded with Milestone XProtect® (license not included)
- > Powerful Quad-Core i7 Haswell processing
- > Solid state design, including fast SSD storage up to 2 TB
- > Wide temperature components operating from 0°C to 60°C
- > Dual Gigabit Ethernet and four PoE ports standard
- > Support for 3 independent displays
- > EN 50155/50121 certified, ensuring reliability in vibration prone mobile environments
- > Comprehensive 3 year warranty with US support



US Office

Phone: +1 802 861 2300
 Email: info@logicsupply.com
www.logicsupply.com

EU Office

Phone: +31 85 2733760
 Email: info@logicsupply.eu
www.logicsupply.eu

RUGGED DESIGN

Encased in a hardened, fully fanless and ventless enclosure, the MX1000 is protected from dust and dirt, and features an operating temperature range of 0°C to 60°C to ensure uninterrupted monitoring. The MX1000 is one of the most reliable NVRs on the market.



OPTIMIZED FOR MOBILE APPLICATIONS

Equipped with a 9~48 V ignition sensing power supply, vibration resistant design, and the ability to efficiently offload recorded media to central servers, the MX1000 is an ideal in-vehicle edge device.

MORE PERFORMANCE, MORE CAMERAS

Featuring a Quad-Core i7 processor and 8GB of fast DDR3 memory, the MX1000 is perfectly equipped for the most demanding applications and features support for up to 25 cameras. The device features four Gigabit PoE ports in addition to two Gigabit Ethernet ports for ease in networking and peripheral connectivity. Plus, with optional dual 2.5" storage drives, the MX1000 can support up to 2TB of storage in it's small, rugged chassis.



Certified Solution for



MILESTONE CERTIFIED, XPROTECT PRELOADED

Milestone is used by over 100,000 security professionals worldwide and the company's rigorous certification process ensures the MX1000 is ideally equipped and ready for XProtect®.

"In both of the tested scenarios, the MX1000 easily passed the certification criteria."

—MTP Certification Performance Report

logicsupply.com/mx1000



US Office

Phone: +1 802 861 2300
Email: info@logicsupply.com
www.logicsupply.com

EU Office


Phone: +31 85 2733760
Email: info@logicsupply.eu
www.logicsupply.eu

Specifications

Front I/O	4 802.3af PoE ports	Graphics/GPU	Intel 4th Generation HD Graphics
	2 USB 3.0 ports		Memory Capacity
Rear I/O	4 RS-232/422/485 COM ports	Memory Speed	1600 MHz
	1 4 Input / 4 Output Isolated DIO port	Memory Slot	2
	1 DisplayPort	Expansion Type	PCIe Mini Card (full height) PCIe Mini Card (half-height)
	1 2.5" Hot-swap HDD bay	LAN Controller	Intel 82583V PCIe GbE Intel I217LM GbE
	1 CFAST slot	Audio Controller	Realtek ALC888S codec
	1 SIM Card slot	Input Voltage	9 ~ 48 V
	1 Removable CMOS battery	Power Input	3-pin Terminal Block connector
	Power button	Operating Temperature	0°C ~ 60°C
		Dimensions (mm)	227 W x 106 H x 261 D
		Mounting	Wall-mount
		Included Accessories	DIO Terminal Block Connector (Female) Power Terminal Block Connector (Female) Remote Power Terminal Block Connector (Female) External Fan Terminal Block Connector (Female) DVI-I to VGA Adapter Wall Mount Kit
	Processor	2.3 GHz Intel Core i7-4770TE	Warranty
Processor Generation	Haswell		
Processor Cores	4		

Dimensional Drawings

All dimensions in mm

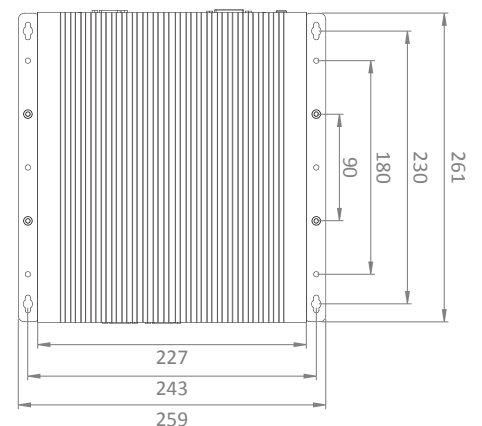

logicsupply.com/mx1000



US Office

Phone: +1 802 861 2300
Email: info@logicsupply.com
www.logicsupply.com

EU Office

Phone: +31 85 2733760
Email: info@logicsupply.eu
www.logicsupply.eu